


A Power Quality analyser and fault recorder

Model PQI-DA smart

- ▶ Wall-mounted housing
- ▶ DIN-Rail housing
- ▶ Panel mounting housing

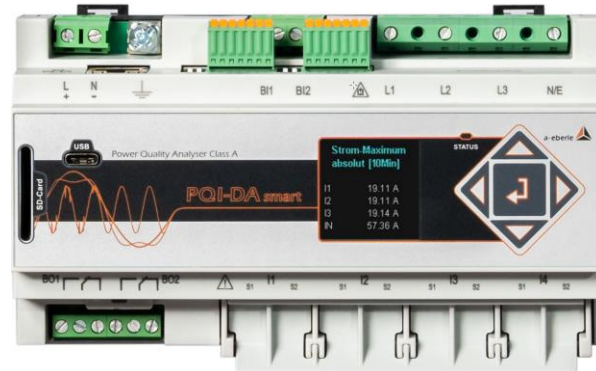

1. Application

Solving all measurement tasks in electrical grids can be a daunting task. The new Power Quality Interface and Disturbance Recorder *PQI-DA smart*, aimed at low, medium and high voltage grids, represents the A-Eberle response to such needs. This central component can be used either as Power Quality-Interface in accordance with all Power Quality standards or as a device for all physically defined/measured values in typical three-phase systems.

Beside the possibility of standard evaluations, the *PQI-DA smart* also has a high speed fault recorder capability with a 40.96kHz/10.24kHz recording rate and a half cycle r.m.s. registration, which allows for a detailed analysis of grid disturbances.

In particular, *PQI-DA smart* is suitable for monitoring, registering, evaluating and recording special reference quantities or quality agreements between the supplier of energy and the end customer. In addition, the device can provide many measured values in parallel for SCADA applications via standardized interfaces such as Modbus.

Modern voltage quality measuring instruments operate according to the IEC 62586 standard, which describes the complete product characteristic of a Power Quality Analyser. This standard defines not only the purpose of use, the EMC environment, the environmental conditions, but also the exact measurement methods (IEC 61000-4-30) in order to create a comparable basis for the user.

Devices from different manufacturers operating according to this standard, must offer the same measurement results.

According to IEC 62586, the *PQI-DA smart* is a device PQI-A-FI-H and has therefore been fully certified in external laboratories.

Power Quality Interface – Class A – Fixed Installed Measurement Device for Indoor operation in Harsh EMC environments.

The *PQI-DA smart* meets all demands of the IEC 61000-4-30 Ed.3 (2015) standard for an A-Class device:

| Parameter IEC61000-4-30 | Class |
|-----------------------------------|-------|
| Power frequency | A |
| Magnitude of the Supply Voltage | A |
| Flicker | A |
| Supply voltage dips and swells | A |
| Voltage interruptions | A |
| Supply voltage unbalance | A |
| Voltage harmonics | A |
| Voltage interharmonics | A |
| Mains signalling voltage | A |
| Underdeviation and overdeviation | A |
| Measurement aggregation intervals | A |
| Time-clock uncertainty | A |
| Flagging | A |
| Transient influence quantities | A |

2. Design

The *PQI-DA smart* has been developed for measurements performed within public grids as well as for recording PQ data within an industrial environment up to 690V (L-L) measurement voltage. Its key characteristics, making it suitable for such environments, are:

- No moving parts (fans, hard drives etc.)
- CAT IV
- Extensive storage capability (can be extended up to 32 GB by the user, permitting several years recording without connection to database)
- **Optional “IEC61000-4-7 - 2kHz to 9kHz” (B1)**
 - Frequency band measurement of voltage and current according IEC 61000-4-7 from 2 kHz to 9 kHz.
 - Sampling rate of voltage and current inputs 40.96 kHz

2.1 Characteristics of the Power-Quality Interface *PQI-DA smart*

2.1.1 Technical Data

- 1.7-inch colour display
- Keypad for basic/direct device configuration
- 1 GB internal memory
- Input channel bandwidth 20 kHz
- 4 voltage inputs
FSR : 480V L-N, Accuracy < 0.1%
- 4 current inputs
 - 1A/5A nominal, 500A max current for 1 sec.
 - 1V voltage input for current clamps
- Simultaneous processing of sampled and calculated voltages and currents
- Oscilloscopic voltage and current recorder
sampling rate : 40.96kHz / 10.24kHz
- Half cycle recorder :
power frequency, r.m.s. of voltages and currents, voltage and current phasors, power
recording rate : ~10ms(50Hz) / ~8.33ms (60Hz)
- Powerful recorder triggering
- Online streaming of voltages and currents at 40.96 kHz sampling rate.
- IEC 61000-4-30, Class A voltage quality processing
- Recording of DIN EN 50160 power quality events
- Spectral analysis 2 kHz...9 kHz,(35 frequency bands, BW = 200Hz) of voltages and currents according (IEC 61000-4-7)

- Phase of voltage and current harmonics n=2..50
- 2 general purpose digital inputs (Trigger, Recording Start / Stop, General documentation of level)
- 2 relay outputs for protection monitoring and alarm
- Complex analysis software WinPQ lite (sold as a package)
- **As an option:** Analysis of the data on an MYSQL-based database using the WinPQ software package. Permanent communication and evaluation of the data with many devices in parallel.

Communication Protocols

- MODBUS RTU
- MODBUS TCP

- IEC60870-5-104 (Option P1)
- IEC61850 (Option P2)

Time synchronisation protocols (Receive / Slave)

- IEEE1344 / IRIG-B000..007
- GPS (NMEA +PPS)
- DCF77
- NTP

Interfaces

| | |
|------------------------------|--------------------|
| Ethernet | RJ45 (10/100 Mbit) |
| 2 * RS232/RS485 on terminals | switchable |

Dimensions

| | |
|-----------|------------------|
| L x B x H | 160 x 90 x 58 mm |
|-----------|------------------|

Weight

| | |
|--------|------|
| Weight | 502g |
|--------|------|

| Voltage inputs | | |
|------------------------------------|---|-----------------------------|
| Feature | E1 | E2 |
| Channels | U ₁ , U ₂ , U ₃ , U _{N/E/4} | |
| Electrical safety DIN EN 61010 | 300V CAT IV 600V CAT III | |
| Input reference level | PE | PE |
| Impedance -> PE | 2 MΩ 25pF | 10 MΩ 25pF |
| Nominal input voltage Un | 100 V _{AC} | 230 V _{AC} |
| Full scale range (FSR) | 0...120 V _{AC} L-E | 0...480 V _{AC} L-E |
| Waveform | Any AC / DC | Any AC / DC |
| Maximum crest factor @ Un | 3 | |
| Bandwidth | DC...20 kHz | |
| Nominal power frequency fn | 50 Hz / 60 Hz | |
| Frequency range of the fundamental | fn ± 15 % 42.5...50..57.5 Hz 51.0...60..69.0 Hz | |

| | |
|-----------------------------------|---|
| Fundamental, r.m.s | ±0.1 % Un (0°C...45°C) ±0.2 % Un (-25°C...55°C) @ 10 %...150 % Un |
| Fundamental, Phase | ±0.01° @ 10%...150%Un |
| Harmonics n = 2..50, r.m.s. | ±5 % of reading @ U _h ≥ 1 % Un ±0.05 % Un @ U _h < 1 % Un |
| Harmonics n = 2..50, Phase | ±n·0.01° @ U _h ≥ 1% Un |
| Interharmonics n = 1..49, RMS | ±5 % of reading @ U _{ih} = ≥ 1% Un ±0.05 % Un @ U _{ih} < 1% Un |
| Power frequency | ±1mHz @ 10%...200%Un |
| Flicker DIN EN 61000-4-15:2011 | Class F2 |

| Voltage inputs | | |
|------------------------------------|--|----|
| Feature | E1 | E2 |
| Dip residual voltage | ±0.2 % Un @ 10%..100%Un | |
| Dip duration | ±20 ms @ 10 %..100 % Un | |
| Swell residual voltage | ±0.2% Un @ 100 %..150 % Un | |
| Swell duration | ±20 ms @ 100 %..150 % Un | |
| Interruption duration | ±20 ms @ 1 %..100 % Un | |
| Voltage unbalance | ±0.15 % @ 1 %..5 % reading | |
| Mains signalling voltage (< 3 kHz) | ±5 % of reading @ U _s = 3 %..15 % Un ±0.15 % Un @ U _s = 1 %..3 % Un | |

| Current inputs | | |
|-----------------------------------|------------------------|--------------------|
| Option | C30 | C31 |
| Channels | I1, I2, I3, IN/4 | |
| Electrical safety DIN EN 61010 | 300V CAT III | |
| Input type | Differential, isolated | |
| Impedance | ≤ 4mΩ | |
| Nominal input current In | 5 A _{AC} | |
| Full scale range (FSR) | 10A _{AC} | 100A _{AC} |
| Overload capacity permanent | 20 A | |
| ≤ 10s | 100 A | |
| ≤ 1s | 500 A | |
| Waveform | AC, any | |
| Maximum crest factor @ In | 4 | |
| Bandwidth | 25Hz...20kHz | |
| Tightening torque | 2 Nm | |

| Accuracy | | |
|--------------------|----------------------|-----------------------|
| Fundamental, r.m.s | < 0,1% FSR 5%...100% | < 0,2% FSR 5% ... 10% |
| Fundamental, Phase | ±0,1° 5%...100% | ±0,2° 5% ... 10% |

| Current inputs (Rogowski coil 1V) – Feature C40 | | Binary outputs (BO) | |
|---|------------------------------------|---|--|
| Option | C40 | 2 binary outputs | 1 x closer 1 x changeover |
| Channels | I1, I2, I3, IN/4 | Contact specification (EN60947-4-1, -5-1) : Configuration | 1 x SPST (Single Pole Single Throw) 1 x SPDT (Single Pole Double Throw) |
| Impedance | 1MΩ | Nominal voltage | 250VAC |
| Input range | 0.35V _{AC} | Nominal current | 6 A |
| Bandwidth | DC...20kHz | Nominal load AC1 | 1500 VA |
| AC Requirements | galvanic isolated | Nominal load AC15, 230VAC | 300 VA |
| | | Interrupting power DC1, 30/110/220 V | 6/0.2/0.12 A |
| Current inputs (current clamps) | | Number of switching operations AC1 | ≥ 60·10 ³ electrical |
| Feature | C44 | C45 | Electrical safety DIN EN 61010 |
| Channels | I1, I2, I3, IN/4 | | 300V |
| Impedance | 1MΩ | 1MΩ | |
| Input range | 0,5 V _{AC} | 5,6 V _{DC} | |
| Bandwidth | DC...20kHz | | |
| AC Requirements | galvanic isolated | | |
| Power Supply | | | |
| Feature | H1 | H2 | |
| AC Nominal range [V] | 100...240 | - | |
| AC Operating range [V] | 90...264 | - | |
| DC Nominal range [V] | 110...320 | 24...60 | |
| DC Operating range [V] | 100...350 | 18...75 | |
| Power consumption | ≤ 10 W < 20 VA | ≤ 10 W | |
| Frequency Nominal | 50...60Hz | DC | |
| Frequency Operating | 40...70Hz | DC | |
| External fuse characteristics | 6A B | 6A B | |
| Energy storage | 2 sec | 2 sec | |
| Storage of measured values | | | |
| Internal memory | 1024 MB | | |
| SD memory card | 1 GByte to 32 GByte | | |
| Binary inputs (BI) | | | |
| Feature | M1 | M2 | |
| 2 binary inputs | 0 V...250 V _{AC} | 0 V...48 V _{DC} | |
| Range | /V _{DC} | | |
| – H – Level | > 35 V | > 10V | |
| – L – Level | < 20 V | < 5V | |
| Signal frequency | DC ... 70 Hz | DC ... 70 Hz | |
| Input resistance | > 100 kΩ | 6.8 kΩ | |
| Electrical isolation | Optocoupler, electrically isolated | | |
| Electrical safety DIN EN 61010 | 300V | | |

| Environmental parameters | Storage and transport | Operation |
|---|--|--|
| Ambient temperature : Limit range of operation | IEC 60721-3-1 / 1K5 -40 ... +70°C IEC 60721-3-2 / 2K4 -40 ... +70°C | IEC 60721-3-3 / 3K6 -25 ... +55°C |
| Ambient temperature : Rated range of operation H1 Rated range of operation H2 | --- | IEC DIN EN 61010 -25 ... +45°C -25 ... +50°C |
| Relative humidity: 24h average No condensation or ice | 5...95 % | 5...95 % |
| Solar radiations | --- | 700W/m2 |
| Vibration, earth tremors | IEC 60721-3-1 / 1M1 IEC 60721-3-2 / 2M1 | IEC 60721-3-3 / 3M1 |

Electrical safety

- IEC 61010-1
- IEC 61010-2-030

| | |
|---|----------------------------------|
| Protection class | 1 |
| Pollution degree | 2 |
| Overvoltage category mains supply option : H1 H2 | 300V / CAT III 150V / CAT III |
| Measurement category | 300V / CAT IV 600V / CAT III |
| Altitude | ≤ 2000m |
| Protection class | IP 20 |

Electromagnetic Compatibility

Immunity

- IEC 61000-6-5, environment H

Emissions


- CISPR22 (EN 55022), class A

2.1.2 Mechanical design


The PQI-DA smart is mountable on the wall or via its DIN rail housing.

All connections are accessible via Phoenix type terminals. The connections are made by using plug-in/clamping technology, except for the current and voltage inputs.

For the TCP/IP interface one RJ 45-connector is available.

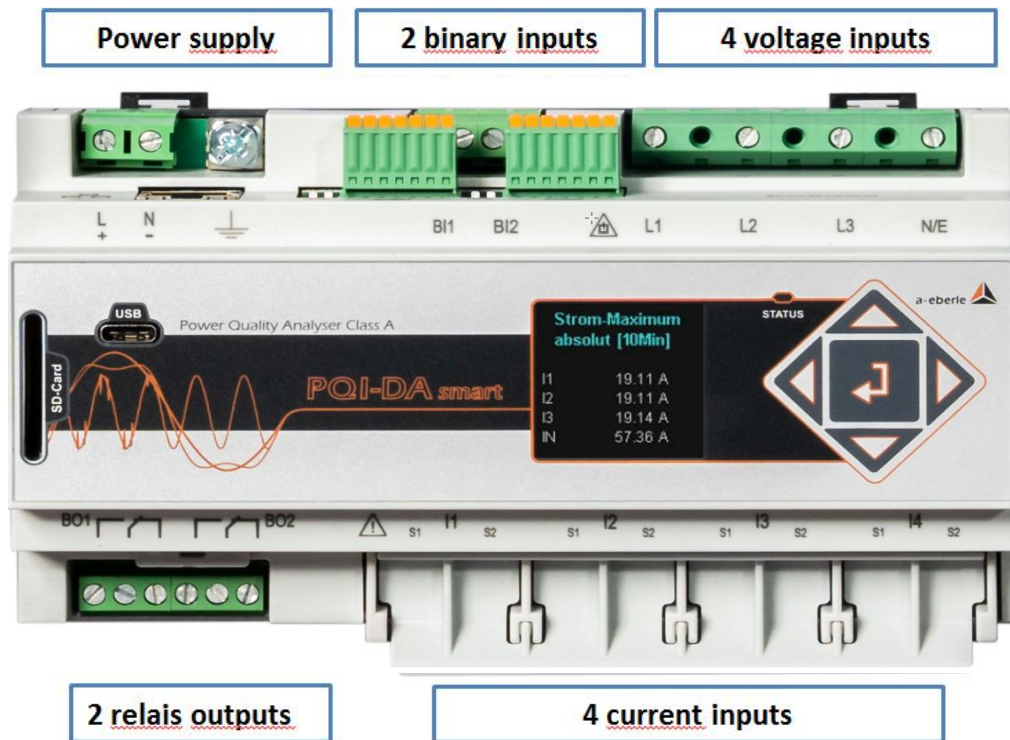


Front view PQI-DA smart

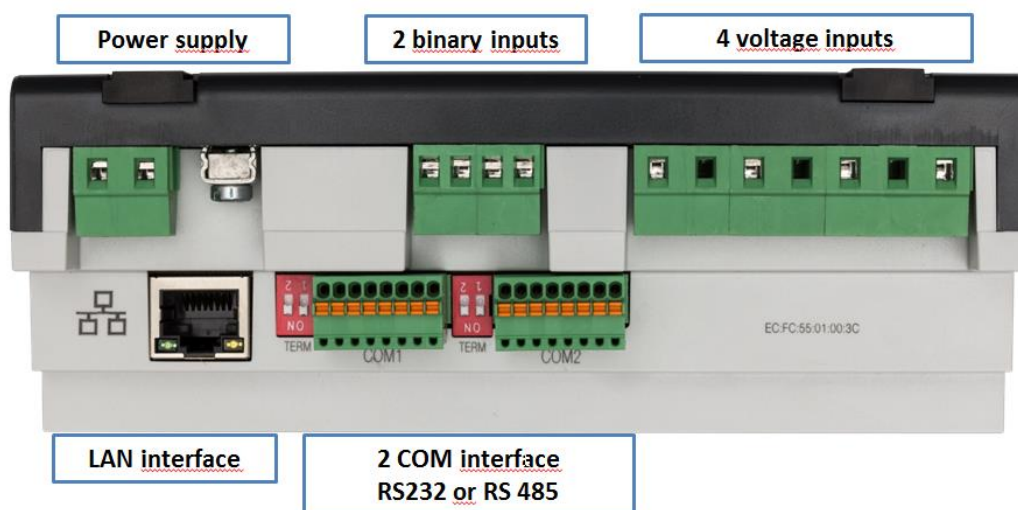


Side view of PQI-DA smart

2.1.3 Terminal strip number PQI-DA smart

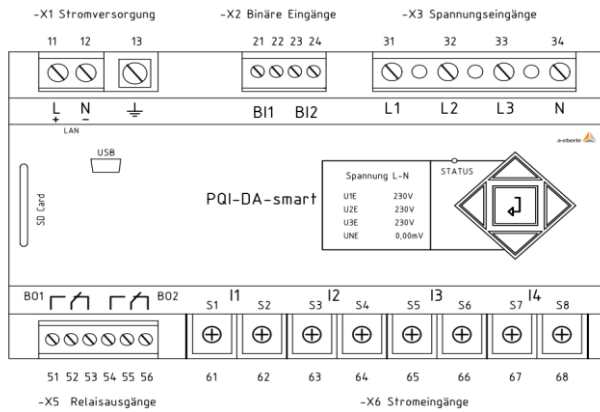

| Terminal strip no. | Designation | | Function | Terminal no. |
|--------------------|---------------------------------|----------------|------------|--------------|
| X1 | Auxiliary voltage | U _H | L (+) | 11 |
| | | | L (-) | 12 |
| X1 | Ground | GND | E | 13 |
| X2 | Binary input (M1/M2) | BI1 | + | 21 |
| | | | - | 22 |
| | | BI2 | + | 23 |
| | | | - | 24 |
| X3 | Phase voltage | U ₁ | L1 | 31 |
| | Phase voltage | U ₂ | L2 | 32 |
| | Phase voltage | U ₃ | L3 | 33 |
| | Neutral point voltage | U ₄ | N | 34 |
| X5 | Binary output 1 | R1 | NC contact | 51 |
| | | | Pol | 52 |
| | | | NO contact | 53 |
| | Binary output 2 | R2 | NC contact | 54 |
| | | | Pol | 55 |
| | | | NO contact | 56 |
| X6 | Phase current L1 | I1 | S1 (K) | 61 |
| | S2 (I) | | 62 | |
| | Phase current L2 | I2 | S1 (K) | 63 |
| | S2 (I) | | 64 | |
| Phase current L3 | I3 | S1 (K) | 65 | |
| S2 (I) | | 66 | | |
| | Neutral conductor / sum current | I4 | S1 (K) | 67 |
| | | | S2 (I) | 68 |


2.1.4 Dimensions

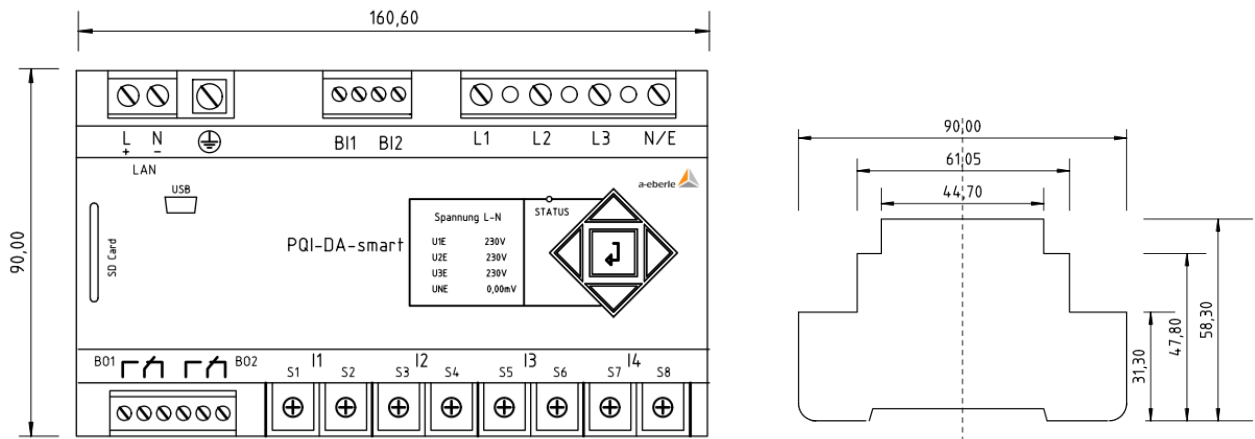

2.1.5 Colour display

The device's 1.7-inch colour display provides information about the correct connections for the measuring cables and current transducers, as well as it indicates online data on voltage, current, THD, power values and energy.

The number of PQ-events that occurred, the oscilloscope records and R.M.S. records for different periods (last day, week or month) are also displayed.

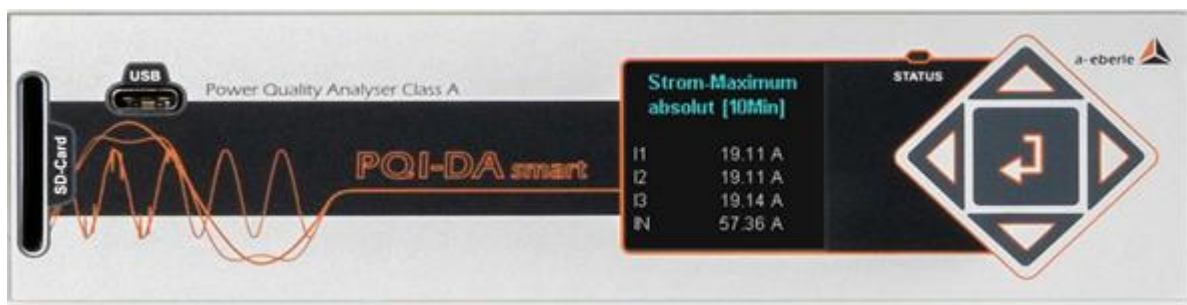

2.2 Measurement / Functions

PQI-DA smart complies with the automatic event detection and measurement standards, which are:

EN50160 (2013) / IEC61000-2-2 / IEC61000-2-12 / IEC61000-2-4 (Class 1; 2; 3) / NRS048 / IEEE519 / IEC61000-4-30 class A / IEC6:1000-4-7 / IEC61000-4-15

Continuous Recording:

Five fixed and two variable measurement time intervals are available for continuous recording:

10/12 T (200ms), 1 sec, n*sec, 150/180 T (3sec), n*min, 10 min, 2 h

| Time Interval Voltage | 10/ 12T | 150/ 180T | 10 min | 2 h | 1 s | N* s | N* min |
|---|------------|--------------|-----------|--------|--------|---------|-----------|
| Power frequency | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Power frequency, 10s-Value (IEC61000-4-30) | | | | | | | |
| Extremes, standard deviation of power frequency (10s) | | | ✓ | | | | |
| r.m.s. values (IEC61000-4-30) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Extremes, standard deviation of T/2-values | | | ✓ | | | | |
| Underdeviation [%], Overdeviation [%] (IEC61000-4-30) | ✓ | ✓ | ✓ | ✓ | | | |
| Harmonic subgroups n= 0..50 (IEC61000-4-7) | ✓ | ✓ | ✓ | ✓ | | | |
| Maximum values of 10/12 T harmonic subgroups n = 2..50 | | | ✓ | | | | |
| Interharmonic subgroups n=0..49 (IEC61000-4-7) | ✓ | ✓ | ✓ | ✓ | | | |
| Total Harmonic Distortion (THDS) (IEC61000-4-7) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Partial Weighted Harmonic Distortion (PWHD) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Unbalance, negative-/positive- sequence, sequence sign | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Unbalance, zero-/positive- sequence | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Positive-, negative-, zero sequence phasors | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Phasors (fundamental) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Flicker (IEC61000-4-15) | | | ✓ | ✓ | | | |
| Instant flicker (IEC61000-4-15) | ✓ | | ✓ | | | | |
| Mains signalling voltages [%] (IEC61000-4-30) | ✓ | ✓ | | | | | |
| Phase angle(zero crossings) of phase voltage harmonics n=2..50 to fundamental of reference voltage | ✓ | ✓ | ✓ | ✓ | | | |
| Frequency bands 1..35, 2kHz..9kHz, r.m.s. (IEC61000-4-7) | | | ✓ | ✓ | ✓ | ✓ | ✓ |

| Time Interval Current | 10/12T | 150/180T | 10 min | 2 h | 1 s | N* s | N* min |
|---|--------|----------|--------|-----|-----|------|--------|
| r.m.s. values | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Extremes of T/2-values | | | ✓ | | | | |
| Harmonic subgroups n= 0..50 (IEC61000-4-7) | ✓ | ✓ | ✓ | ✓ | | | |
| Maximum values of 10/12 T harmonic subgroups n = 2..50 | | | ✓ | | | | |
| Interharmonic subgroups n=0..49 (IEC61000-4-7) | ✓ | ✓ | ✓ | ✓ | | | |
| Total Harmonic Distortion (THDS) (IEC61000-4-7) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Total Harmonic Currents | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Partial Weighted Harmonic Distortion (PWHD) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Partial Odd Harmonic Currents (PHC) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| K-Factors | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Unbalance, negative-/positive- sequence, sequence sign | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Unbalance, zero-/positive- sequence | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Positive-, negative-, zero sequence phasors | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Phasors (fundamental) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Phase angle(zero crossings) of current harmonics n=2..50 to fundamental of reference voltage | ✓ | ✓ | ✓ | ✓ | | | |
| Frequency bands 1..35 , 2kHz..9kHz, r.m.s. (IEC61000-4-7) | | | ✓ | ✓ | ✓ | ✓ | ✓ |


| Time Interval Energy | 10 min | 2 h | 1 s | N* s | N* min |
|---|--------|-----|-----|------|--------|
| Active energy, phase | ✓ | ✓ | ✓ | ✓ | ✓ |
| Active energy, total | ✓ | ✓ | ✓ | ✓ | ✓ |
| Exported active energy, phase | ✓ | ✓ | ✓ | ✓ | ✓ |
| Exported active energy, total | ✓ | ✓ | ✓ | ✓ | ✓ |
| Imported active energy, phase | ✓ | ✓ | ✓ | ✓ | ✓ |
| Imported active energy, total | ✓ | ✓ | ✓ | ✓ | ✓ |
| Reactive energy (inductive), phase | ✓ | ✓ | ✓ | ✓ | ✓ |
| Reactive energy (inductive), total | ✓ | ✓ | ✓ | ✓ | ✓ |
| Exported reactive energy (inductive), phase | ✓ | ✓ | ✓ | ✓ | ✓ |
| Exported reactive energy (inductive), total | ✓ | ✓ | ✓ | ✓ | ✓ |
| Imported reactive energy (inductive), phase | ✓ | ✓ | ✓ | ✓ | ✓ |
| Imported reactive energy (inductive), total | ✓ | ✓ | ✓ | ✓ | ✓ |

| Time Interval Power | 10 min | 2 h | 1 s | N* | N* |
|---|--------|-----|-----|----|-----|
| | min | h | s | s | min |
| Active power, phase | ✓ | ✓ | ✓ | ✓ | ✓ |
| Active power, total | ✓ | ✓ | ✓ | ✓ | ✓ |
| Active power extremes | ✓ | | | | |
| Reactive power, phase | ✓ | ✓ | ✓ | ✓ | ✓ |
| Reactive power, total | ✓ | ✓ | ✓ | ✓ | ✓ |
| Reactive power extremes | ✓ | | | | |
| Apparent power, phase | ✓ | ✓ | ✓ | ✓ | ✓ |
| Apparent power, total | ✓ | ✓ | ✓ | ✓ | ✓ |
| Fundamental active power, phase | ✓ | ✓ | ✓ | ✓ | ✓ |
| Fundamental active power, total | ✓ | ✓ | ✓ | ✓ | ✓ |
| Fundamental reactive power, phase | ✓ | ✓ | ✓ | ✓ | ✓ |
| Fundamental reactive power (displacement), total | ✓ | ✓ | ✓ | ✓ | ✓ |
| Fundamental apparent power, phase | ✓ | ✓ | ✓ | ✓ | ✓ |
| Phase angle of fundamental apparent power, phase | ✓ | ✓ | ✓ | ✓ | ✓ |
| Fundamental apparent power, total | ✓ | ✓ | ✓ | ✓ | ✓ |
| Phase angle of fundamental apparent power, total | ✓ | ✓ | ✓ | ✓ | ✓ |
| Reactive distortion power, phase | ✓ | ✓ | ✓ | ✓ | ✓ |
| Reactive distortion power, total | ✓ | ✓ | ✓ | ✓ | ✓ |
| Active power factors, phase, total | ✓ | ✓ | ✓ | ✓ | ✓ |
| Reactive power factors, phase, total | ✓ | ✓ | ✓ | ✓ | ✓ |
| COSφ + sign, phase, total | ✓ | ✓ | ✓ | ✓ | ✓ |
| SINφ + sign, phase, total | ✓ | ✓ | ✓ | ✓ | ✓ |
| COSφ + sign of reactive distortion power, phase, total | ✓ | ✓ | ✓ | ✓ | ✓ |
| Capacitive-, inductive scaling factor of COSφ (-1..0..+1) : | ✓ | ✓ | ✓ | ✓ | ✓ |
| Triggered interval mean active power, phase | | | | | |
| Triggered interval mean active power, total | | | | | |
| Triggered interval mean reactive power, phase | | | | | |
| Triggered interval mean reactive power, total | | | | | |

2.3 Oscilloscopic recorder

Sampling rate: 40.96 kHz or 10.24 kHz
 Max. Record length: 4s (40.96 kHz) or 16s (10.24 kHz)


| Quantities | |
|-------------------------|--------------------------|
| 3-wire system | 4-wire system |
| phase – ground voltages | phase –neutral voltages |
| residual voltage | neutral – ground voltage |
| phase – phase voltages | |
| phase currents | |
| total current | neutral current |

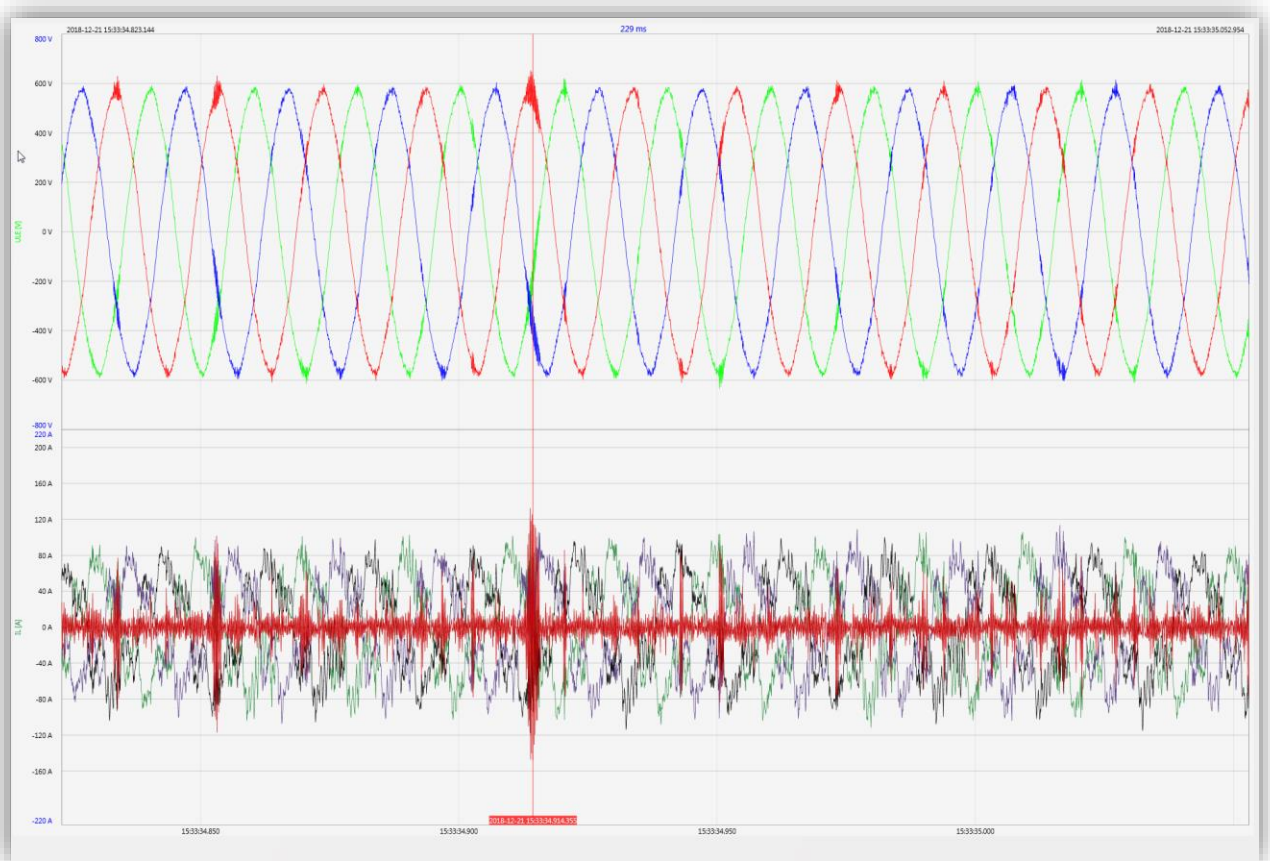

2.4 Half cycle recorder

Recording rate: ~10ms (50Hz) or ~8.333ms (60Hz)
 Max. Record length: 6min (50Hz) or 5min (60Hz)

| Quantities | |
|---|--|
| Power frequency | |
| r.m.s. voltages | |
| r.m.s. currents | |
| Active power, phase | |
| Reactive power, phase | |
| Active power, total | |
| Fundamental reactive power (displacement), total | |
| Phase angle of fundamental apparent power, total | |
| Voltage phasors (fundamental) | |
| Current phasors (fundamental) | |
| Positive-, negative-, zero sequence voltage phasors | |
| Positive-, negative-, zero sequence current phasors | |

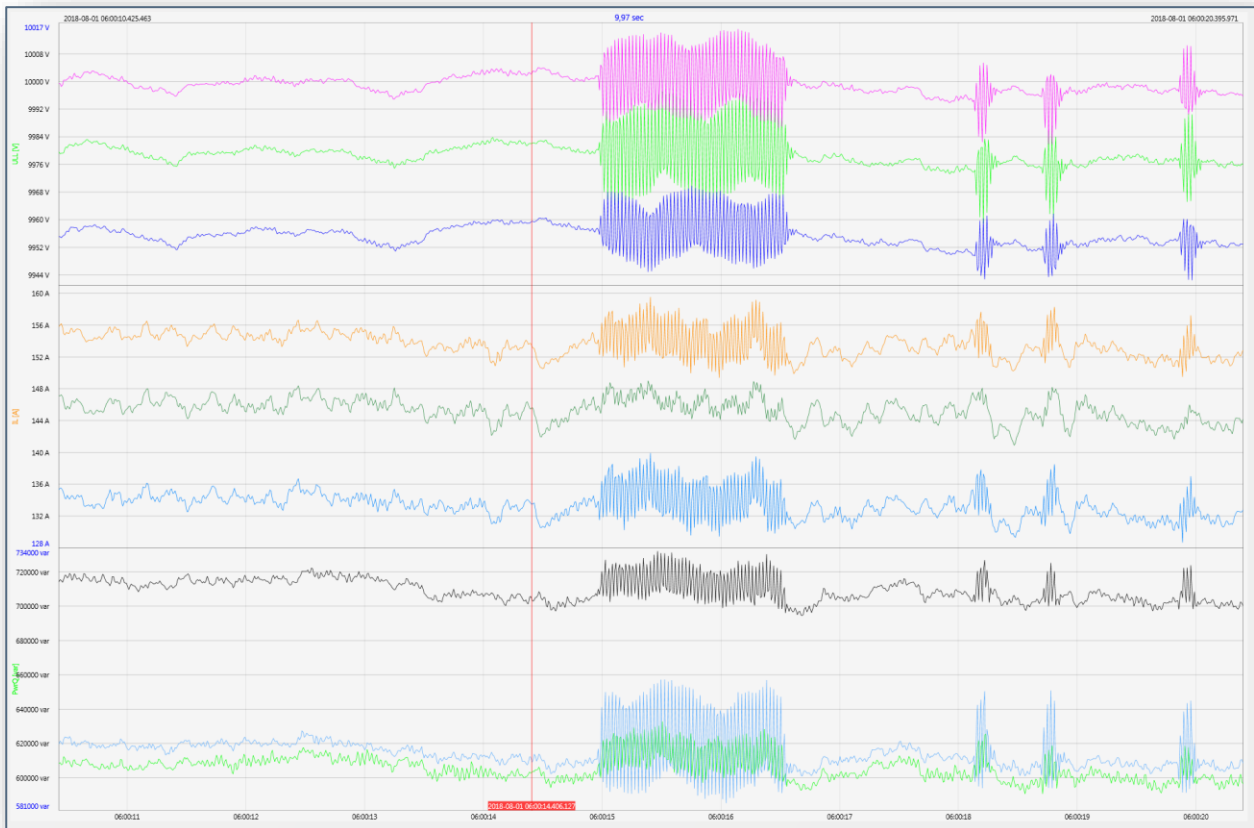

2.5 Recorder triggering

| trigger quantity | lower | upper | step |
|--|-----------------------|-------|------|
| r.m.s. phase voltages (T/2) | ✓ | ✓ | ✓ |
| r.m.s. phase-phase voltages (T/2) | ✓ | ✓ | ✓ |
| r.m.s. residual/neutral-ground voltage (T/2) | | ✓ | ✓ |
| Positive sequence voltage (T/2) | ✓ | ✓ | |
| Negative sequence voltage (T/2) | | ✓ | |
| Zero sequence voltage (T/2) | | ✓ | |
| Phase voltage phase (T/2) | | | ✓ |
| phase voltages wave shapes (wave shape filter) | +/- threshold | | |
| phase-phase voltages wave shapes (wave shape filter) | | | |
| residual/neutral-ground voltage wave shape (wave shape filter) | | | |
| r.m.s. phase currents (T/2) | ✓ | ✓ | ✓ |
| r.m.s. total / neutral current (T/2) | | ✓ | ✓ |
| Power frequency (T/2) | ✓ | ✓ | ✓ |
| Binary inputs (debounced) | rising, falling slope | | |
| Command | external | | |

2.6 PQ Events:

| trigger quantity | lower | upper |
|--|--|-------|
| voltage dip (T/2) | ✓ | |
| voltage swell (T/2) | | ✓ |
| voltage interruption (T/2) | ✓ | |
| voltage rapid voltage change (T/2) | sliding average filter mean +/- threshold | |
| voltage change (10min) | ✓ | ✓ |
| voltage unbalance (10min) | | ✓ |
| mains signalling voltage (150/180T) | | ✓ |
| voltage harmonics (10min) | | ✓ |
| voltage THD (10min) | | ✓ |
| voltage short term flicker PST (10min) | | ✓ |
| voltage long term flicker PLT (10min) | | ✓ |
| power frequency (10s) | ✓ | ✓ |

2.7 Online mode for direct readings

Measurement / Functions

Oscilloscopic recorder


Voltage and current harmonics $n=2..50$

Voltage and current interharmonics $n=0..49$

Voltage and current harmonics 2-9kHz

Frequency spectra up to 20 kHz of voltages and currents

Online streaming of all data classes and all measured values

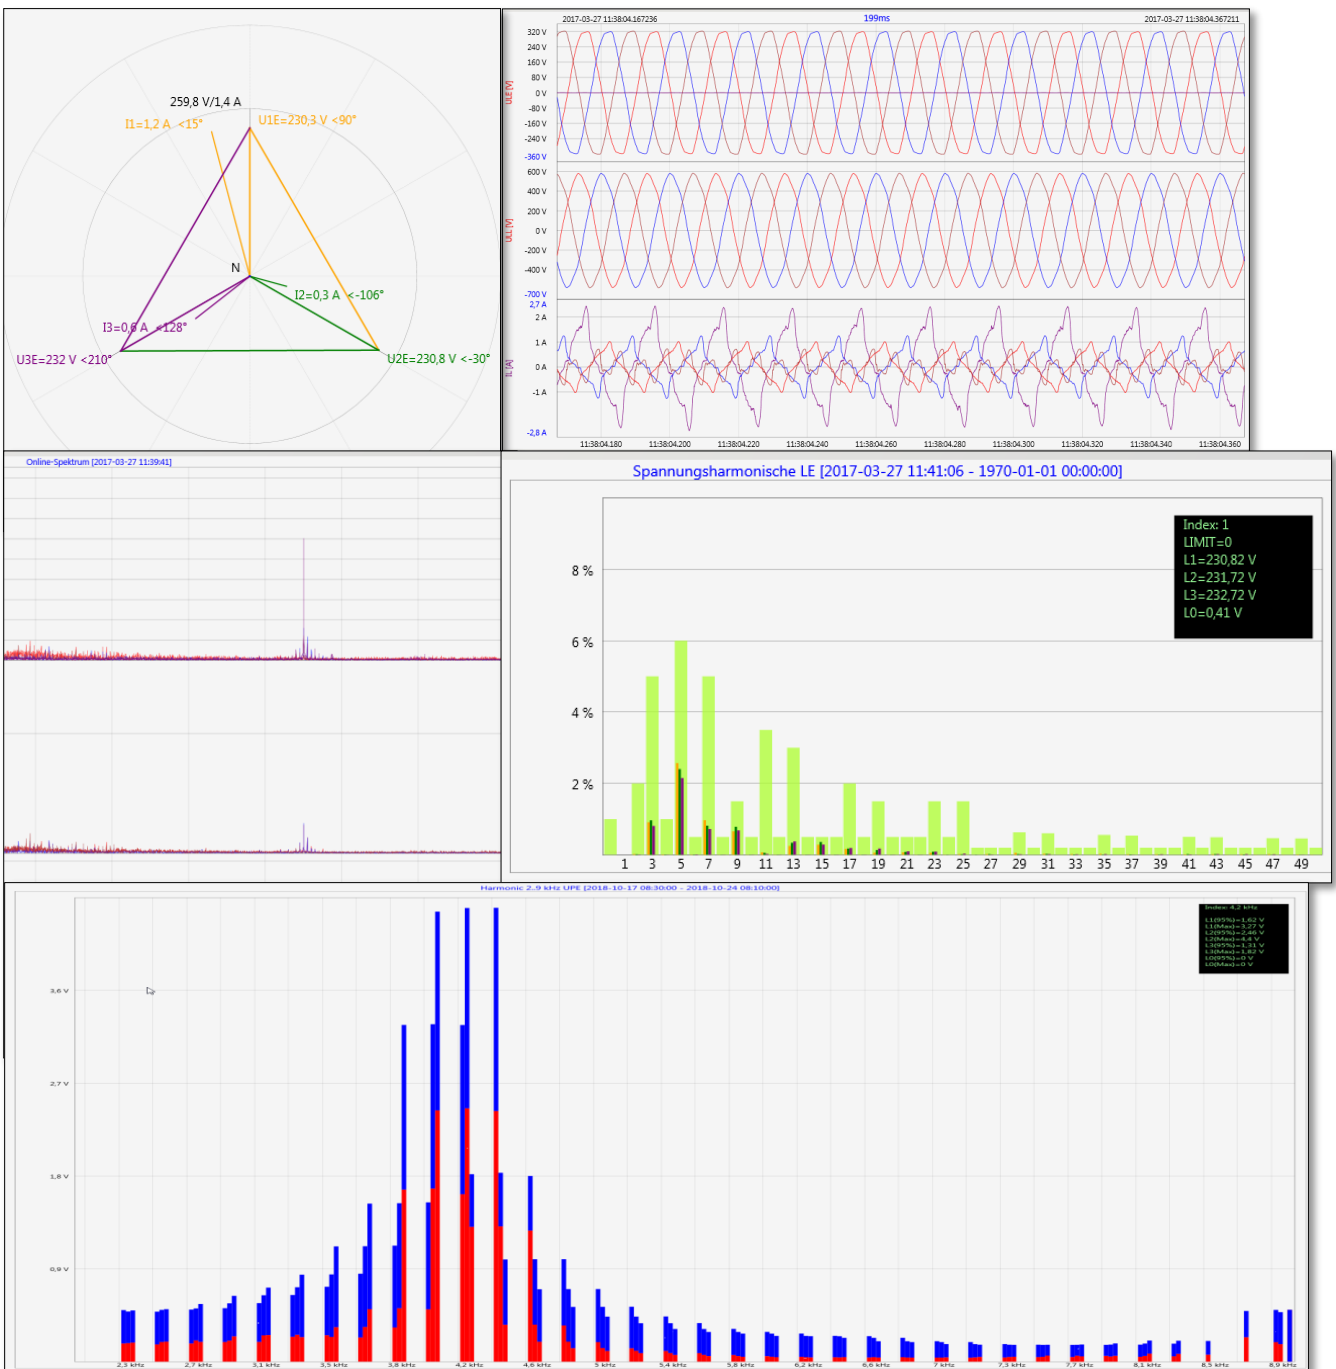

3. Order specifications *PQI-DA smart*

For determining the smart code ordering details:

- Only one unit can be ordered for codes with the same capital letter.
- When a code's capital letter is followed by the number 9, additional information in plain text is required.
- When a code's capital letter is followed only by zeros, the code may be omitted.

| Characteristic | Code |
|---|--|
| Power Quality Interface and fault recorder <ul style="list-style-type: none"> ● 4 voltage converters, 4 current transformers ● In accordance with DIN EN-50160 and IEC 61000-4-30 (Class A) ● 2 digital inputs ● 2 relay outputs ● WinPQ lite software for <i>PQI-DA smart</i> | <i>PQI-DA smart</i> |
| Supply voltage <ul style="list-style-type: none"> ● AC 90 V..110 V..264 V or DC 100 V..220 V..350 V ● DC 18 V...60 V...70 V | H1 H2 |
| Rated value of the input voltage <ul style="list-style-type: none"> ● 100V 2MΩ (CAT IV 300V) ● 100V / 400V / 690V 10MΩ (CAT IV 300V) | E1 E2 |
| Current inputs <ul style="list-style-type: none"> ● 4 current inputs for metering circuit 1A/5A (range 10A) ● 4 current inputs for protection circuit 1A/5A (range 100A) ● 4 current inputs for Rogowski Coils – Q4/2019 ● 4 AC current inputs for current clamps (0,5 V_{AC}) – Q4/2019 ● 4 DC current inputs for current clamps (5,6 V_{DC}) – Q4/2019 | C30 C31 C40 C44 C45 |
| Binary inputs <ul style="list-style-type: none"> ● 2 programmable binary inputs (AC/DC 48..250V) ● 2 programmable binary inputs (DC 10..48V) | M1 M2 |
| Option IEC61000-4-7 (40,96kHz sampling) <ul style="list-style-type: none"> ● 10,24kHz sampling; without 2kHz to 9kHz measurement ● Frequency measurement of voltage and current from 2 kHz to 9 kHz 40.96kHz sampling oscilloscope recorder | B0 B1 |
| Option communication protocol <ul style="list-style-type: none"> ● Modbus RTU & TCP ● IEC 60870-5-104 (RJ45) ● IEC61850 (RJ45) | P0 P1 P2 |
| Operating instructions <ul style="list-style-type: none"> ● German ● English ● French ● Spanish ● Italian ● Chinese ● Russian | G1 G2 G3 G4 G5 G6 G7 |

3.1 Option PQI-DA smart

| Software WinPQ lite | Code |
|--|----------------------|
| Software WinPQ lite For parameterising <i>PQI-DA smart</i> , as well as reading <i>PQI-DA smart</i> measurement data and online data as a single-user licence – free of charge | 900.9086 |
| Expansion WinPQ lite For recalibration of the PQI-DA smart and test report creation | 900.9287 |
| WinPQ database | Code |
| Software WinPQ For parameterization, archiving and evaluation of PQI-D, PQI-DA, PQI-DA smart and PQI-DE measurement data with the following basic functions: <ul style="list-style-type: none"> ● 32-bit/64-bit Windows program interface ● Database for saving the measured values per measuring point ● Data access via TCP/IP network ● Visualization option for all measured variables retrievable from a PQI-D, PQI-DA, PQI-DA smart and PQI-DE as a function of time and as a statistical variable ● Automatic reporting according to EN50160; IEC61000-2-2 / 2-4; IEEE519; etc. ● Automatic export functions (Comtrade , PQDif, ASCII, PDF) and fault report transmission ● One additional workstation license for one Windows user is included in the price | WinPQ |
| Licences <ul style="list-style-type: none"> ● as single-user license for 2 PQ measuring instruments (PQI-D, PQI-DA, PQI-DA smart, PQI-DE) ● as single-user license for 2 to 10 PQ measuring instruments (PQI-D, PQI-DA, PQI-DA smart, PQI-DE) ● as single-user license for > 10 PQ measuring instruments (PQI-D, PQI-DA, PQI-DA smart, PQI-DE) ● as single-user license for > 100 PQ measuring instruments (PQI-D, PQI-DA, PQI-DA smart, PQI-DE) | L0 L1 L2 L3 |
| Operating instructions <ul style="list-style-type: none"> ● German ● English | A1 A2 |
| PQI-DA smart | Code |
| SD-memory card (external): 4 GByte industrial standard | 900.9099.04 |
| Frame for panel mounting | 564.0435 |
| DIN-rail, wall mounted housing | 564.0433 |
| Radio time clock interface DFC 77 | 111.9024.01 |
| GPS-Clock – Navilog Set - RS485 . DIN-Rail | 111.7083 |
| GPS receiver, GPS converter 5m connection cable, mounting bracket | |
| Power supply for Navilog (DIN rail power supply, 88-264VAC/24V, 10W) | 111.7079 |
| Rogowski Coil for C40; 1..3000A; 85mV/1000A; 10Hz..20kHz; 15m connection cable; one piece | 111.7087 |
| Current clamp for C44 high accurate for secondary measurement circuits | 111.7095 |
| 0...5A; 100mV/A; 10Hz..10kHz; 10m connection cable; one piece | |

A. Eberle GmbH & Co. KG

Frankenstraße 160
D-90461 Nuremberg

Tel.: +49 (0) 911 / 62 81 08-0

Fax: +49-(0)911-62 81 08 99

E-mail: info@a-eberle.de

<http://www.a-eberle.de>

Presented by:

Copyright 2017 by A. Eberle GmbH & Co. KG

Subject to change without prior notice.

Version: 012/14/2020 10:16 AM