


Shunt measuring box

111.7055

- ▶ For the measurement of AC and DC current with PQ-Box

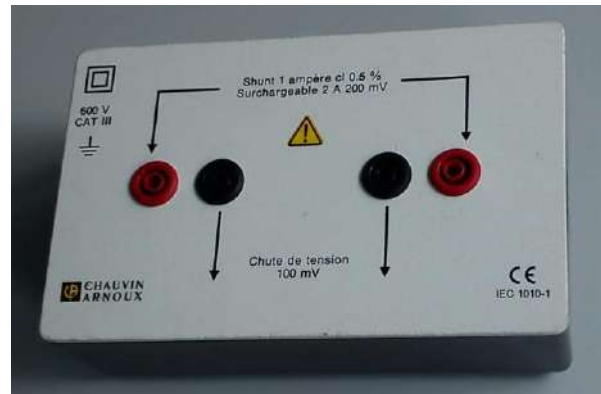

1. Use

This device is used for measuring of AC and DC current with PQ-Box by a shunt resistor.

Caution:

The measurement potential may not exceed 30 V.

2. Structure

The shunt resistor is set into a fully isolated housing. The current to be measured is connected to the red sockets. The measured voltage is tapped by the black sockets.

Caution:

For connection with PQ-Box, the adapter cable set (111.7004) is available.

4. Technical Data

Connection:	4x 4mm safety socket
Shunt:	1A – 100mV (max. 2A)
Protection class:	600 V, CAT III / 2 A

3. Dimensions and weight

L/W/H in mm	152	95	52
Weight in g	420		

We take care of it.

5. Ordering Information

FEATURE	ORDER CODE
Shunt measuring box <ul style="list-style-type: none">● Shunt measuring box, 1A – 100mV, 600V CAT III	111.7055
ACCESSORIES	ORDER CODE
Adapter cable set <ul style="list-style-type: none">● Adapter cable, 8-polig, Length 2m	111.7004

A. Eberle GmbH & Co. KG

Frankenstraße 160
D-90461 Nürnberg

Tel.: +49 (0) 911 / 62 81 08-0
Fax: +49 (0) 911 / 62 81 08 96
E-Mail: info@a-eberle.de

<http://www.a-eberle.de>

Version: 11/6/2017 4:03 PM

Copyright 2013 by A. Eberle GmbH & Co. KG

Subject to change without notice.

Magnetic voltage probe 7 mm

111.7008

- ▶ Magnetic adapter for electrical connection to screw heads.




1. Use

This magnetic adapter is used for a fast and easy electrical connection to screw heads. Voltages can be tapped from circuit breakers and power switches with PQ-Box.

2. Structure

The probes magnetic head consists of a strong magnet which is set between two iron poles. Subsequently the holding force is extra strong. The probes top has a convex surface shape to ensure a good electrical connection at curved screw heads.

3. Dimensions

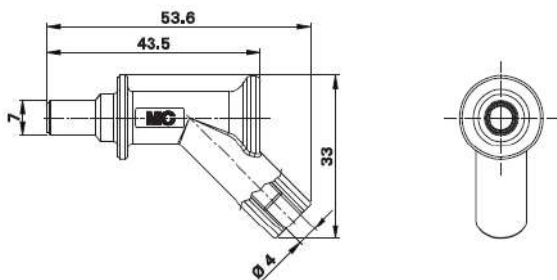

Practical application example



4. Technical Data

Voltage:	1000V
Peak diameter:	7mm
Socket:	4mm
Protection class:	1000V, CAT III, 2A

We take care of it.

5. Ordering Information

FEATURE	ORDER CODE
Magnetic voltage probe, set ● Magnetic adapter, 3x red, 1x blue, Peak 7mm, Socket 4mm, 1000V CAT III, 2A	111.7008
Magnetic voltage probe, red ● Magnetic adapter, red, Peak 7mm, Socket 4mm, 1000V CAT III, 2A	111.7008.01
Magnetic voltage probe, blue ● Magnetic adapter, red, Peak 7mm, Socket 4mm, 1000V CAT III, 2A	111.7008.02

A. Eberle GmbH & Co. KG

Frankenstraße 160

D-90461 Nürnberg

Tel.: +49 (0) 911 / 62 81 08-0

Fax: +49 (0) 911 / 62 81 08 96

E-Mail: info@a-eberle.de

<http://www.a-eberle.de>

Version: 11/6/2017 3:59 PM

Copyright 2013 by A. Eberle GmbH & Co. KG

Subject to change without notice.

Magnetic voltage probe, 6 mm

111.7045

- ▶ **Magnetic adapter for electrical connection to screw heads.**



1. Use

This Magnetic adapter is used for a fast and easy electrical connection to screw heads. Voltages can be tapped from circuit breakers and power switches with PQ-Box.

2. Structure

The probes magnetic head consists of a strong magnet which is set between two iron poles. Subsequently the holding force is extra strong. The probes top has a convex surface shape to ensure a good electrical connection at curved screw heads.

Practical application example



3. Technical Data

Voltage:	1000V
Peak diameter:	6mm
Socket:	4mm
Protection class:	1000V, CAT III, 2A

We take care of it.

4. Ordering Information

FEATURE	ORDER CODE
Magnetic voltage probe, set ● Magnetic adapter, 3x black, 1x blue, Peak 6mm, Safety socket 4mm, 1000V CAT III, 2A	111.7045

A. Eberle GmbH & Co. KG

Frankenstraße 160
D-90461 Nürnberg

Tel.: +49 (0) 911 / 62 81 08-0
Fax: +49 (0) 911 / 62 81 08 96
E-Mail: info@a-eberle.de

<http://www.a-eberle.de>

Version: 11/6/2017 3:59 PM

Copyright 2013 by A. Eberle GmbH & Co. KG

Subject to change without notice.

Grip-F voltage probe

111.7053

▶ Adjustable voltage probe for bus bars and bolts.





1. Use

This adapter is used for a fast and easy connection to bus bars or bolts. Voltages can be measured by PQ-Box.

2. Structure

The voltage probe features two flat, adjustable legs on the top. It is connected by a 4 mm safety plug.

3. Dimensions

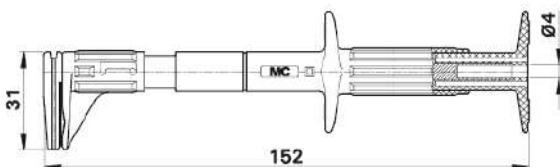

Practical application example



4. Technical Data

Voltage:	600V
Peak range:	0..20mm / 10..30mm
Socket:	4mm
Protection class:	600V, CAT III, 5A

We take care of it.

5. Ordering Information

FEATURE	ORDER CODE
Grip-F voltage probe ● Grip-F voltage probe, red, safety socket 4mm, 600V CAT III, 5A	111.7053

A. Eberle GmbH & Co. KG

Frankenstraße 160
D-90461 Nürnberg

Tel.: +49 (0) 911 / 62 81 08-0
Fax: +49 (0) 911 / 62 81 08 96
E-Mail: info@a-eberle.de

<http://www.a-eberle.de>

Version: 11/6/2017 4:10 PM

Copyright 2014 by A. Eberle GmbH & Co. KG

Subject to change without notice.

Clutch – voltage probe

111.7065

- ▶ Voltage taps for fast and reliable contact to pins/bolts.



1. Use

This voltage tap is used for fast and reliable contacting to pins or bolts. The voltage can be measured by PQ-Box.



2. Structure

The voltage probe consists of a pair of steel claws which are insulated on the outside. They can be connected by 4 mm safety plugs.

Practical application example



3. Dimensions

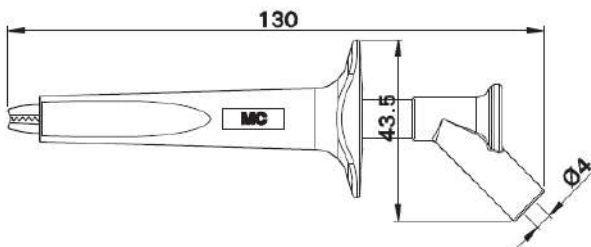

4. Technical Data

Voltage:	1000 V
Peak:	20 mm
Socket:	4 mm
Protection class:	1000 V, CAT IV, 20 A

We take care of it.

5. Ordering Information

FEATURE	ORDER CODE
Clutch voltage probe ● Clutch voltage probe, red, safety socket 4mm, 1000V CAT IV, 20A	111.7065

A. Eberle GmbH & Co. KG

Frankenstraße 160
D-90461 Nürnberg

Tel.: +49 (0) 911 / 62 81 08-0
Fax: +49 (0) 911 / 62 81 08 96
E-Mail: info@a-eberle.de

<http://www.a-eberle.de>

Version: 11/6/2017 4:11 PM


Copyright 2014 by A. Eberle GmbH & Co. KG

Subject to change without notice.

Measuring adapter, 5-pole voltage and current

111.7068

- ▶ **Measuring adapter with 16A plug and coupling. For tapping voltages and current.**

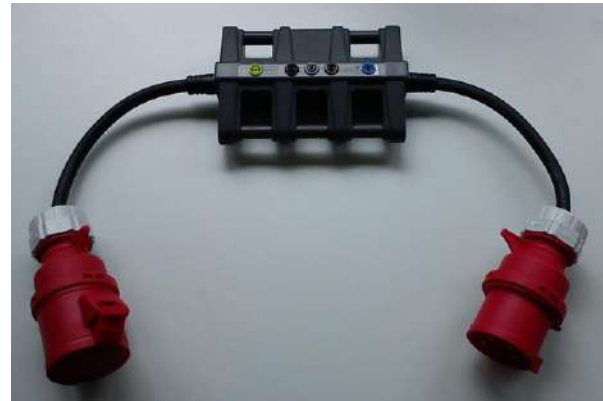

1. Use

This adapter cable can be used for devices with a maximum current of 32 A. The voltage can be measured by safety sockets. Current measuring is possible with current clamps.

2. Structure

A fully insulated housing is mounted between a 16 A coupling and a 16 A plug. The 5 measuring sockets for L1, L2, L3, N and PE are located into this housing. The voltages can be measured directly by PQ-Box. Furthermore there are five gaps for current measuring. There the current may be measured by current clamps.

3. Technical Data

Voltage:	400 V
Plug:	16 A
Socket:	4 mm
Protection class:	400 V, CAT III

We take care of it.

4. Ordering Information

FEATURE	ORDER CODE
Measurement adapter, 5-pole ● Measurement adapter, 5-pole, safety socket 4 mm, 400 V, 16 A, CAT III	111.7068

A. Eberle GmbH & Co. KG

Frankenstraße 160
D-90461 Nürnberg

Tel.: +49 (0) 911 / 62 81 08-0
Fax: +49 (0) 911 / 62 81 08 96
E-Mail: info@a-eberle.de

<http://www.a-eberle.de>

Version: 11/6/2017 4:01 PM

Copyright 2016 by A. Eberle GmbH & Co. KG
Subject to change without notice.

Extension of measuring cable

111.7054.x

- ▶ **Extension of measuring line. Voltage measurement with PQ-Box.**
Colors: black, red, blue or green



1. Use

This device is used to extend measurement cables.


2. Construction

Extremely flexible 2 m silicone cable owns a 4 mm safety plug on one side and a 4 mm safety socket on the other side.

3. Dimensions



Length: 2m



4. Technical Data

Voltage:	1000V
Connection:	4mm, safety plug/socket
Current:	Max. 19A
Protection class:	CAT III

We take care of it.

5. Ordering Information

FEATURE	ORDER CODE
Extension ● Extension, 2m, black	111.7054.00
Extension ● Extension, 2m, red	111.7054.01
Extension ● Extension, 2m, blue	111.7054.02

A. Eberle GmbH & Co. KG

Frankenstraße 160
D-90461 Nürnberg

Tel.: +49 (0) 911 / 62 81 08-0
Fax: +49 (0) 911 / 62 81 08 96
E-Mail: info@a-eberle.de

<http://www.a-eberle.de>

Version: 6/20/2018 9:28 AM

Copyright 2014 by A. Eberle GmbH & Co. KG
Subject to change without notice.

Measuring adapter, 3-pole voltage and current

111.7056

- ▶ **Measuring adapter incl. protective contact, plug and coupling.**
For voltage and current measuring.



1. Use

This adapter is installed in supply cables of electrical devices with a maximum current of 10 A. Voltages can be measured by the measurement sockets and current can be measured with current clamps.

2. Structure

The device consists of a SCHUKO plug on one side and a modified SCHUKO socket on the other side. Six measurement sockets for L, N, PE are integrated into the fully-insulated housing. The measurement voltage can be tapped by PQ-Box. Current can be measured by current clamps. Therefore the sockets have to be connected by safety lines.

3. Technical Data

Voltage:	230 V
Plug:	10 A
Socket:	4 mm
Protection class:	250 V, CAT II

We take care of it.

4. Ordering Information

FEATURE	ORDER CODE
Measuring adapter, 3-pole ● Measuring adapter, 3-pole, safety socket 4mm, 230V, 10A, CAT II	111.7056

A. Eberle GmbH & Co. KG

Frankenstraße 160
D-90461 Nürnberg

Tel.: +49 (0) 911 / 62 81 08-0
Fax: +49 (0) 911 / 62 81 08 96
E-Mail: info@a-eberle.de

<http://www.a-eberle.de>

Version: 11/6/2017 4:00 PM

Copyright 2014 by A. Eberle GmbH & Co. KG
Subject to change without notice.

Test plug

582.0511

- ▶ For providing auxiliary voltage for PQ-Box



1. Use

This adapter is used to contact sockets with European design. Thereby the auxiliary voltage for PQ-Box can be obtained. It also can be used for voltage measurement with PQ-Box.

2. Structure

For the connection to PQ-Box this adapter owns two 4 mm safety sockets. These fit for 4 mm safety plugs with fixed isolation.

3. Dimensions and weight

L/W/H in mm	62	38	38
Weight in g	50		

4. Technical Data

Connection:	2x 4mm safety socket
Plug:	European socket
Protection class:	250 V, CAT II / 16 A

We take care of it.

5. Ordering Information

FEATURE	ORDER CODE
Test plug ● Test plug, European socket, 2x 4mm safety socket, 250 V, CAT II / 16 A	582.511

A. Eberle GmbH & Co. KG

Frankenstraße 160
D-90461 Nürnberg

Tel.: +49 (0) 911 / 62 81 08-0
Fax: +49 (0) 911 / 62 81 08 96
E-Mail: info@a-eberle.de

<http://www.a-eberle.de>

Version: 9/28/2018 10:28 AM

Copyright 2013 by A. Eberle GmbH & Co. KG
Subject to change without notice.

Measuring adapter, 5-pole voltage and current

111.7042

- ▶ **Measuring adapter with 32A plug and coupling. For tapping voltages and current.**



1. Use

This adapter cable can be used for devices with a maximum current of 32 A. The voltage can be measured by safety sockets. Current measuring is possible with current clamps.

2. Structure

A fully insulated housing is mounted between a 32 A coupling and a 32 A plug. The 5 measuring sockets for L1, L2, L3, N and PE are located into this housing. The voltages can be measured directly by PQ-Box. Furthermore there are five gaps for current measuring. There the current may be measured by current clamps.

3. Technical Data

Voltage:	400 V
Plug:	32 A
Socket:	4 mm
Protection class:	400V, CAT III

We take care of it.

4. Ordering Information

FEATURE	ORDER CODE
Measuring adapter, 5-pole ● Measuring adapter, 5-pole, safety socket 4mm, 400V, 32A, CAT III	111.7042

A. Eberle GmbH & Co. KG

Frankenstraße 160
D-90461 Nürnberg

Tel.: +49 (0) 911 / 62 81 08-0
Fax: +49 (0) 911 / 62 81 08 96
E-Mail: info@a-eberle.de

<http://www.a-eberle.de>

Version: 11/6/2017 4:02 PM

Copyright 2013 by A. Eberle GmbH & Co. KG
Subject to change without notice.

Test plug

111.7072

- ▶ For voltage measurement at a 16 A CEE socket with PQ-Box



1. Use

This adapter is used to measure voltages at 16 A CEE sockets with PQ-Box.

2. Structure

This device owns five 4 mm safety sockets for the connection to the three phases, neutral conductor and ground. These fit for 4 mm safety plugs with fixed isolation.

3. Dimensions and weight

Length/diameter in mm	95	65	
Weight in g	210		

4. Technical Data

Connection:	5x 4mm safety plug
Plug:	16A CEE
Protection class:	400 V, CAT II / 16 A

We take care of it.

5. Ordering Information

FEATURE	ORDER CODE
Test plug ● Test plug, 16 A CEE, 5x 4 mm safety socket, 400 V, CAT II / 16 A	111.7072

A. Eberle GmbH & Co. KG

Frankenstraße 160
D-90461 Nürnberg

Tel.: +49 (0) 911 / 62 81 08-0
Fax: +49 (0) 911 / 62 81 08 96
E-Mail: info@a-eberle.de

<http://www.a-eberle.de>

Version: 11/6/2017 3:47 PM

Copyright 2015 by A. Eberle GmbH & Co. KG
Subject to change without notice.

Contact holder and cable set with banana plugs

111.7037, 111.7038

► Contact holder and cable set with banana plug



1. Use

These devices are used for the contacting of sector conductors and tapping voltages with PQ-Box.

- Simple assembly
- Mountable under voltage
- No special tools required
- Shear nut for optimal electrical contact
- Attachable in any conductor position
- Suitable for Al and Cu conductors
- Holder can be resolved easily

2. Structure

This clamp is installed by hooking into the conductor and closing the piercing contact. When the perfect torque is reached, the shear nut is going to tear off.

The clamp is easy to handle at tight connections and can be connected at each side of the sector conductor.

The PLCON system consists of four contact holders and a four pole cable set.

3. Technical Data

Conductor cross-section:	35-240mm ²
Measuring cable cross-section:	1,5mm ²
Fuse:	16A

Practical application example



We take care of it.

4. Ordering Information

FEATURE	ORDER CODE
Contact holder, 1 piece ● Contact holder, Conductor cross-section 35-240mm ² , for use with cable set	111.7037
Cable set, 4-pole ● Cable set, 4-pole, 1,5mm ² , Length 2m, Fuse 4x 16A, Safety plug 4x 4mm	111.7038

A. Eberle GmbH & Co. KG

Frankenstraße 160
D-90461 Nürnberg

Tel.: +49 (0) 911 / 62 81 08-0
Fax: +49 (0) 911 / 62 81 08 96
E-Mail: info@a-eberle.de

<http://www.a-eberle.de>

Version: 11/6/2017 3:57 PM

Copyright 2013 by A. Eberle GmbH & Co. KG

Subject to change without notice.

Test tap – voltage probe

4 mm

111.7067

- ▶ Voltage probe for fast and reliable contacting of sockets.





1. Use

This device is used for the fast and reliable contacting of sockets. The voltage can be measured by PQ-Box.

2. Structure

The 4 mm test tap owns a peak with elastic contact slat. The handle is fully insulated and contains a 4mm safety socket for contacting the PQ-Box. A protective cap is included.

3. Dimensions

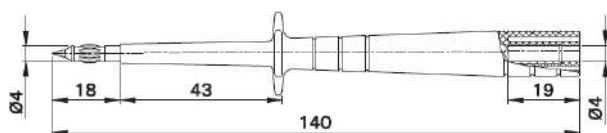

4. Technical Data

Voltage:	1000 V
Peak:	4 mm
Socket:	4 mm
Protection class:	1000 V, CAT II, 32 A

We take care of it.

5. Ordering Information

FEATURE	ORDER CODE
Test tap – voltage probe ● Test tap – voltage probe, red, safety plug 4mm, 1000 V CAT II, 32 A	111.7067

A. Eberle GmbH & Co. KG

Frankenstraße 160
D-90461 Nürnberg

Tel.: +49 (0) 911 / 62 81 08-0
Fax: +49 (0) 911 / 62 81 08 96
E-Mail: info@a-eberle.de

<http://www.a-eberle.de>

Version: 11/6/2017 3:49 PM

Copyright 2014 by A. Eberle GmbH & Co. KG

Subject to change without notice.

Adapter cable

582.2037

▶ Adapter cable to branch off measurement cables



1. Use

This device is used to tap measurement voltages or auxiliary voltage from a measurement spot.

2. Structure

The adapter consists of a stackable safety plug on one side and a stackable socket on the other side.

3. Technical Data

Voltage:	1000 V
Plug:	4 mm
Socket:	2x 4 mm
Protection class:	CAT III

We take care of it.

4. Ordering Information

FEATURE	ORDER CODE
Adapter cable <ul style="list-style-type: none">● Adapter cable, 1000 V, CAT III	582.2037

A. Eberle GmbH & Co. KG

Frankenstraße 160
D-90461 Nürnberg

Tel.: +49 (0) 911 / 62 81 08-0
Fax: +49 (0) 911 / 62 81 08 96
E-Mail: info@a-eberle.de

<http://www.a-eberle.de>

Version: 11/6/2017 4:11 PM

Copyright 2015 by A. Eberle GmbH & Co. KG
Subject to change without notice.

Spring grabber – voltage probe 4mm

111.7066

- ▶ Voltage tab for fast and reliable contact of pins/bolts.



1. Use

This device is used for the fast and reliable contacting of pins or bolts. The voltage can be measured by PQ-Box.



2. Structure

The spring grabber consists of a spring wire of stainless steel. So pins or bolts can be accessed even at tight spots. The shaft is insulated by silicone and guarantees heat resistance and flexibility. The voltage tap is connected by 4 mm safety plug.

4. Technical Data

Voltage:	1000 V
Peak:	2,5mm
Socket:	4 mm
Protection class:	1000 V, CAT III, 4A

3. Dimensions

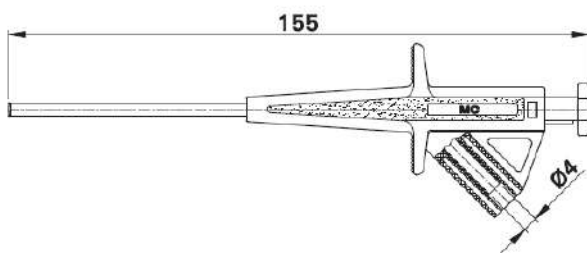

We take care of it.

5. Ordering Information

FEATURE	ORDER CODE
Spring grabber voltage probe ● Spring grabber voltage probe, red, safety socket 4 mm, 1000V CAT III, 4 A	111.7066

A. Eberle GmbH & Co. KG

Frankenstraße 160
D-90461 Nürnberg

Tel.: +49 (0) 911 / 62 81 08-0
Fax: +49 (0) 911 / 62 81 08 96
E-Mail: info@a-eberle.de

<http://www.a-eberle.de>

Version: 11/6/2017 4:10 PM

Copyright 2014 by A. Eberle GmbH & Co. KG

Subject to change without notice.

Variogrip - voltage probe

111.7051 / 111.7052

- ▶ Adjustable voltage probe for hexagon socket screws 5 mm/6 mm




1. Use

This adapter is used for a fast and easy connection to bolts/screws with hexagonal socket. Voltages can be tapped from circuit breakers and power switches with PQ-Box.


2. Structure

By turning the screw at the end of the adapter, the hexagonal top is spread. In succession, a hexagon socket screw (5 mm/6 mm) may be connected firmly. The various contact points enable a low contact resistance. The device can be handled under voltage and is contacted by a 4 mm safety plug.

3. Dimensions

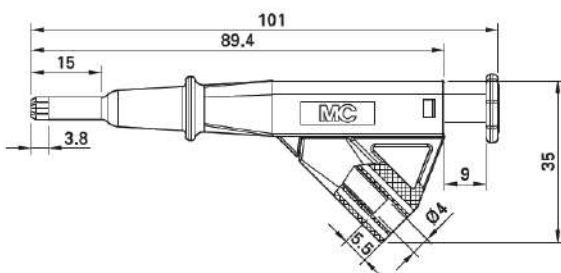

Practical application example

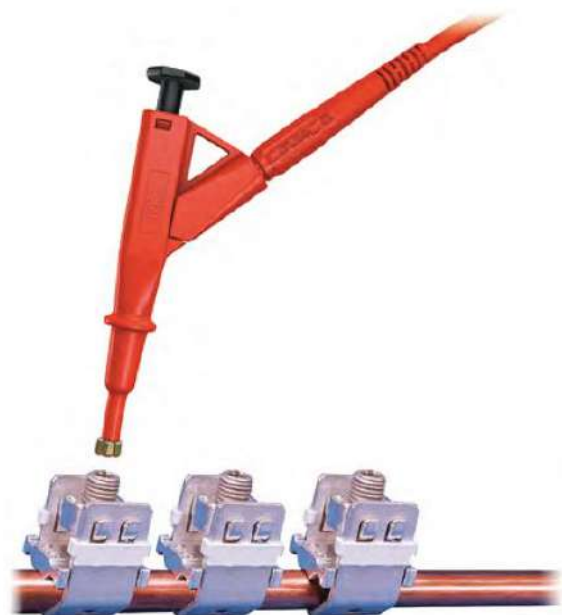

4. Technical Data

Voltage:	1000V
Peak diameter:	5mm / 6mm
Socket:	4mm
Protection class:	1000V, CAT IV, 24A

We take care of it.

5. Ordering Information

FEATURE	ORDER CODE
Variogrip voltage probe, 5mm ● Variogrip voltage probe, 5mm, red, safety socket 4mm, 1000V CAT IV, 24A	111.7051
Variogrip voltage probe, 6mm ● Variogrip voltage probe, 6mm, red, safety socket 4mm, 1000V CAT IV, 24A	111.7052

A. Eberle GmbH & Co. KG

Frankenstraße 160
D-90461 Nürnberg

Tel.: +49 (0) 911 / 62 81 08-0

Fax: +49 (0) 911 / 62 81 08 96

E-Mail: info@a-eberle.de

<http://www.a-eberle.de>

Version: 11/6/2017 3:51 PM


Copyright 2014 by A. Eberle GmbH & Co. KG

Subject to change without notice.

Dolphin clamps

111.7024

- ▶ For tapping the measuring voltage with PQ-Box.
This kit contains:
3x red
1x blue
1x green

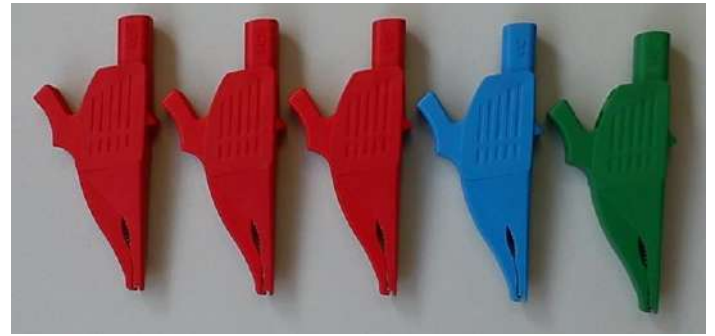

1. Use

These clamps are used to tap voltages with PQ-Box.



2. Structure

The fully-insulated dolphin clamp is made of brass and consists of a serrated clamp a clamping surface for fine wires. It is connected by a 4 mm safety socket. This short circuit-safe version features fully-insulated and non-slip legs.

4. Technical Data

Voltage:	600V
Connection:	4mm, Safety socket
Current:	Max. 16A
Protection class:	CAT IV

3. Dimensions

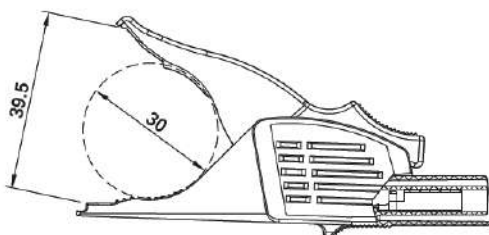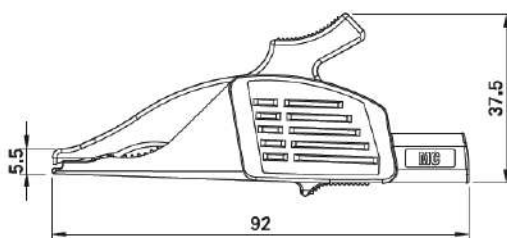

We take care of it.

5. Ordering Information

FEATURE	ORDER CODE
Dolphin clamp, kit ● Dolphin clamp, 3x red, 1x blue, 1x green	111.7024
Dolphin clamp, rot ● Dolphin clamp, 1x rot	111.7024.01
Dolphin clamp, blue ● Dolphin clamp, 1x blue	111.7024.02
Dolphin clamp, rot ● Dolphin clamp, 1x green	111.7024.03

A. Eberle GmbH & Co. KG

Frankenstraße 160
D-90461 Nürnberg

Tel.: +49 (0) 911 / 62 81 08-0
Fax: +49 (0) 911 / 62 81 08 96
E-Mail: info@a-eberle.de

<http://www.a-eberle.de>

Version: 11/6/2017 4:09 PM

Copyright 2013 by A. Eberle GmbH & Co. KG

Subject to change without notice.

Test plug

582.0509

- ▶ For providing auxiliary voltage for PQ-Box incl. four adapters



1. Use

This adapter is used to contact sockets in Europe, UK, Australia and USA. Thereby the auxiliary voltage for PQ-Box can be obtained.

2. Structure

For the connection to PQ-Box this adapter owns two 4 mm safety sockets. These fit for 4 mm safety plugs with fixed isolation. Socket adapters for Europe, UK, Australia and USA are included.

4. Technical Data

Connection:	2x 4mm safety socket
Plug:	Europe, UK, Australia and USA
Protection class:	250 V, CAT II / 16 A

3. Dimensions and weight

L/W/H in mm	80	45	85
Weight in g	50		

We take care of it.

5. Ordering Information

FEATURE	ORDER CODE
Test plug ● Test plug, four inserts , 2x 4 mm safety socket, 250 V, CAT II / 16 A	582.509

A. Eberle GmbH & Co. KG

Frankenstraße 160
D-90461 Nürnberg

Tel.: +49 (0) 911 / 62 81 08-0
Fax: +49 (0) 911 / 62 81 08 96
E-Mail: info@a-eberle.de

<http://www.a-eberle.de>

Version: 11/6/2017 3:48 PM

Copyright 2013 by A. Eberle GmbH & Co. KG
Subject to change without notice.

Fuse protected voltage probe

111.7014.02

- ▶ Fused voltage probe for protection of voltage measurement. 1A, 1000V



1. Use


The fused voltage probe is used for the protection of voltage measurement of PQ-Box 100.

This allows a measurement at high protected measuring points without the occurrence of an electric arc at the measuring line.

2. Structure



Practical application example

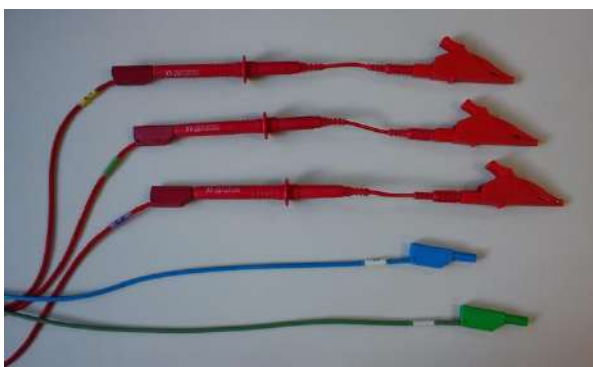

3. Technical Data

Voltage:	600V
Fuse:	1A
Plug:	4mm
Socket:	4mm
Voltage class:	CAT IV 600V / CAT III 1000V

We take care of it.

4. Ordering Information

FEATURE	ORDER CODE
Fuse protected voltage probe ● Fuse protected voltage probe, 600V, 1A, CAT IV	111.7014.02
ACCESSORIES	ORDER CODE
Replacement fuse, 500mA ● Replacement fuse, 1000V, 500mA	582.1058
Replacement fuse, 1A ● Replacement fuse, 1000V, 1A	582.1059
Replacement fuse, 2A ● Replacement fuse, 600V, 2A	582.1060

A. Eberle GmbH & Co. KG

Frankenstraße 160
D-90461 Nürnberg

Tel.: +49 (0) 911 / 62 81 08-0
Fax: +49 (0) 911 / 62 81 08 96
E-Mail: info@a-eberle.de

<http://www.a-eberle.de>

Version: 11/6/2017 3:50 PM

Copyright 2013 by A. Eberle GmbH & Co. KG

Subject to change without notice.

Test plug

582.0513

► For providing auxiliary voltage for PQ-Box 200



1. Use

This adapter is used to provide the auxiliary voltage for PQ-Box 200.

2. Structure


This extremely flexible adapter cable owns a SCHUKO socket at one end. The other end consists of three stackable 4 mm safety plugs for phase, neutral and ground conductor. For use in Germany only.

3. Dimensions and weight

L in mm	1500		
Weight in g	300		

4. Technical Data

Voltage:	250V
Conductor cross-section:	3x 2,5mm ²
Plug:	Stackable, 4mm
Protection class:	250V, CAT II, 16A

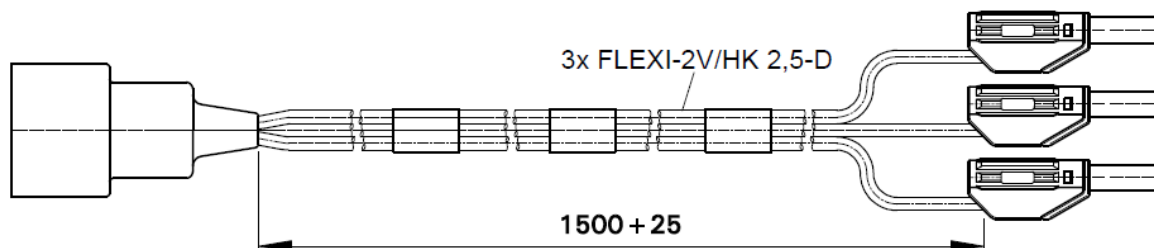

We take care of it.

5. Ordering Information

FEATURE	ORDER CODE
Test plug ● SCHUKO socket, cable 3x2,5mm ² , stackable plugs 4mm, 250V CAT II	582.0513

A. Eberle GmbH & Co. KG

Frankenstraße 160
D-90461 Nürnberg

Tel.: +49 (0) 911 / 62 81 08-0
Fax: +49 (0) 911 / 62 81 08 96
E-Mail: info@a-eberle.de

<http://www.a-eberle.de>

Version: 11/6/2017 3:48 PM

Copyright 2013 by A. Eberle GmbH & Co. KG
Subject to change without notice.

Colored label set

111.7044

- ▶ Label set for color coding of measurement cables of PQ-Box and accessories.



1. Use

These devices are used for color coding of measurement cables of PQ-Box and accessories. The clips can be easily removed from the carrier ring and may be attached to the measurement cables.

2. Structure

The colored plastic clips are appropriate for measurement cables of PQ-Box and for the connection cables of Rogowski coils and current clamps.

We take care of it.

3. Ordering Information

FEATURE	ORDER CODE
Colored label set ● Colored label set for PQ-Box and accessories	111.7044

A. Eberle GmbH & Co. KG

Frankenstraße 160
D-90461 Nürnberg

Tel.: +49 (0) 911 / 62 81 08-0
Fax: +49 (0) 911 / 62 81 08 96
E-Mail: info@a-eberle.de

<http://www.a-eberle.de>

Version: 11/6/2017 4:09 PM

Copyright 2014 by A. Eberle GmbH & Co. KG

Subject to change without notice.